




# SeaWinds Product Manual

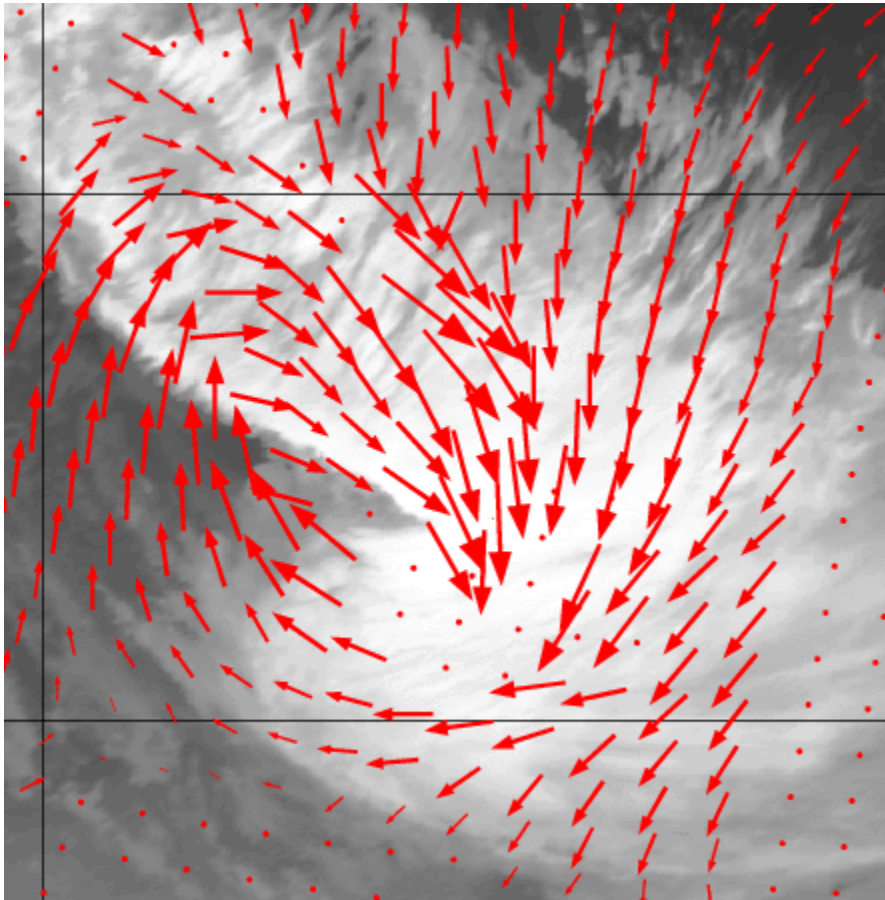

**Ocean and Sea Ice SAF**

**Version 1.4**

**September 2007**

|                                 |
|---------------------------------|
| <b>DOCUMENT SIGNATURE TABLE</b> |
|---------------------------------|

|                      | <b>Name</b>                 | <b>Date</b> | <b>Signature</b> |
|----------------------|-----------------------------|-------------|------------------|
| <b>Prepared by :</b> | O&SI SAF Project<br>Team    | 10 Sep 2007 |                  |
| <b>Approved by :</b> | O&SI SAF Project<br>Manager | 10 Sep 2007 |                  |

|                                    |
|------------------------------------|
| <b>DOCUMENTATION CHANGE RECORD</b> |
|------------------------------------|

| <b>Issue / Revision</b> | <b>Date :</b>  | <b>Change :</b> | <b>Description :</b>  |
|-------------------------|----------------|-----------------|---|
| Version 0.9             | April 2003     |                 | Draft version.  |
| Version 0.99            | January 2004   | Minor           | QC flag correction, Chapter 3 from UM incorporated  |
| Version 1.0             | June 2004      | Minor           | Version taking in account ORR-1-B RID037: <a href="http://www.osi-saf.org">www.osi-saf.org</a> mentioned in §1.1, overview. |
| Version 1.1             | October 2005   | Minor           | Adaptation to SDP, included file name convention  |
| Version 1.2             | April 2006     | Minor           | Adapted web location of [Ref-6]   |
| Version 1.3             | September 2006 | Minor           | Use of ECMWF NWP data   |
| Version 1.4             | September 2007 | Minor           | Introduction of 25-km product   |

**KNMI, de Bilt, the Netherlands**

Reference: SAF/OSI/KNMI/TEC/MA/134

## CONTENTS

|        |  |    |
|--------|--|----|
| 1.     | Introduction.....                            | 3  |
| 1.1.   | Overview.....                                | 3  |
| 1.2.   | References .....                             | 4  |
| 2.     | SeaWinds Instruments .....                   | 5  |
| 2.1.   | SeaWinds-I and SeaWinds-II.....              | 5  |
| 2.2.   | Rain problem .....                           | 7  |
| 2.3.   | Sea ice detection .....                      | 7  |
| 3.     | Algorithms.....                              | 8  |
| 3.1.   | Wind definition .....                        | 8  |
| 3.1.1. | Geophysical Model Function .....             | 9  |
| 3.2.   | Wind Retrieval .....                         | 10 |
| 3.2.1. | Ambiguity Removal.....                       | 11 |
| 3.2.2. | Quality Control.....                         | 11 |
| 3.3.   | Detailed SeaWinds algorithm description..... | 11 |
| 3.4.   | Monitoring .....                             | 11 |
| 4.     | Processing scheme .....                      | 13 |
| 4.1.   | NWP collocation .....                        | 13 |
| 4.2.   | Validation .....                             | 13 |
| 4.3.   | Quality control and monitoring.....          | 13 |
| 4.4.   | Software Configuration .....                 | 14 |
| 4.5.   | Dissemination .....                          | 14 |
| 5.     | Data description.....                        | 15 |
| 5.1.   | Wind product characteristics.....            | 15 |
| 5.2.   | File formats .....                           | 16 |
| 6.     | Data Quality.....                            | 18 |
| 6.1.   | Reliability .....                            | 18 |
| 6.1.1. | Usable 100 km WVC .....                      | 18 |
| 6.2.   | Accuracy .....                               | 18 |
| 6.3.   | Ambiguity selection.....                     | 23 |
| 6.4.   | Quality indices and data use .....           | 23 |
| 7.     | Glossary .....                               | 24 |
| 8.     | Literature .....                             | 25 |

# 1. Introduction

## 1.1. Overview

The Ocean and Sea Ice Satellite Application Facility (OSI SAF) is producing a range of air-sea interface products, namely: wind, sea ice characteristics, Sea Surface Temperatures (SST) and radiative fluxes, Surface Solar Irradiance (SSI) and Downward Longwave Irradiance (DLI).

This document is the wind product manual dedicated to the OSI SAF wind product users. It describes the global SeaWinds products available at KNMI.

Note: useful information on this product and more generally on the whole OSI SAF project, is available on the OSI SAF web site at the following address: <http://www.osi-saf.org/>.

KNMI has a long experience in scatterometer processing and is developing generic software for this purpose. Processing systems for the ERS scatterometers were adopted for NSCAT, SeaWinds and ASCAT.

The scatterometer is an instrument that provides information on the wind field near the ocean surface, and scatterometry is the knowledge of extracting this information from the instrument's output. Space-based scatterometry has become of great benefit to meteorology and climate in the past years (e.g., Isaksen and Stoffelen, 2000).

NASA and NOAA put available SeaWinds products; the former produces science products, whereas NOAA provides a near-real time wind product that is used as basis for further processing at KNMI. Our SeaWinds products are different from the NASA and NOAA products, since special emphasis is put on

- increasing the **reliability** of the wind vectors by Quality Control and rejection of rain-contaminated Wind Vector Cells (WVC);
- improving **accuracy** by noise reduction through spatial averaging and meteorological filtering;
- Guaranteeing **correctness** by monitoring of the operational SeaWinds data and KNMI processing; and
- **Reduce** wind direction selection **errors** by meteorologically-balanced wind direction Ambiguity Removal (AR).

These wind quality issues are further elaborated in this manual and discussed in section 6.

Over the whole globe 80% of SeaWinds products are available within 3 hours after the last satellite data acquisition. Availability includes the processing time at KNMI which is less than 10 minutes and a not very substantial part of the total delay.

The KNMI products are delivered on request through the FTP server to all users and through EUMETCast. See also <http://www.knmi.nl/scatterometer/> for real-time graphical examples of the products and up-to-date information and documentation.

The easiest access to the SeaWinds products is through the OSI SAF as described in this report. Alternatively, in the context of the Numerical Weather Prediction SAF (see <http://www.metoffice.gov.uk/research/interproj/nwpsaf/index.html>) software is developed and maintained to produce scatterometer winds from raw backscatter data which may be implemented at the user site if special processing features are desired. The NWP SAF software is used by the OSI SAF production system. In the context of the climate (CM) SAF KNMI is developing the Scatterometer Ocean Stress (SOS) product from the OSI SAF wind product.

This user manual outlines user information for the KNMI products based on the SeaWinds scatterometers [Ref-2] [Ref-4]. Section 2 presents a brief description of the SeaWinds instruments, section 3 the processing algorithms, and section 4 gives an overview of the data processing configuration. Section 5 provides detailed information on the file content and format, while in section 6 the product quality is elaborated.

## 1.2. References

[Ref-1] KNMI scatterometer web site: <http://www.knmi.nl/scatterometer/>

[Ref-2] O&SI SAF wind product documentation on <http://www.osi-saf.org/>:

1. Scientific documents:

- 2D Variational Ambiguity Removal

2. Technical documents

- Science Plan
- OSI SAF User Requirements Document
- OSI SAF Project Plan
- O&SI SAF Report on Algorithm Development and Prototyping Activities
- OSI SAF top-level Configuration Management Plan
- OSI SAF Output Products Format Document
- OSI SAF Software Requirements Document
- ICD for the wind production of the OSI SAF
- SVVP for the wind production of the OSI SAF

[Ref-3] NWP SAF website: <http://www.metoffice.gov.uk/research/interproj/nwpsaf/index.html>

[Ref-4] NASA SeaWinds Documentation: [http://podaac.jpl.nasa.gov/quikscat/qscat\\_doc.html](http://podaac.jpl.nasa.gov/quikscat/qscat_doc.html)


[Ref-5] Thesis "Wind Field Retrieval from Satellite radar systems" by Marcos Portabella, available on <http://www.knmi.nl/scatterometer/publications/>

[Ref-6] Thesis "Scatterometry" by Ad Stoffelen, available on <http://igitur-archive.library.uu.nl/dissertations/01840669/inhoud.htm>

[Ref-7] Leidner, M., Hoffman, R., and Augenbaum, J., "SeaWinds scatterometer real-time BUFR geophysical data product", version 2.3.0, NOAA/NESDIS, June 2000, available on [ftp://metroweb.nesdis.noaa.gov/pub/seawinds/bufr\\_v2.3.0.ps.gz](ftp://metroweb.nesdis.noaa.gov/pub/seawinds/bufr_v2.3.0.ps.gz).

[Ref-8] Verhoef, A. and Stoffelen, A., "Ambiguity Removal using different background wind fields", OSI SAF Technical Report, August 2006, available on <http://www.knmi.nl/scatterometer/publications/>.

## 2. SeaWinds Instruments

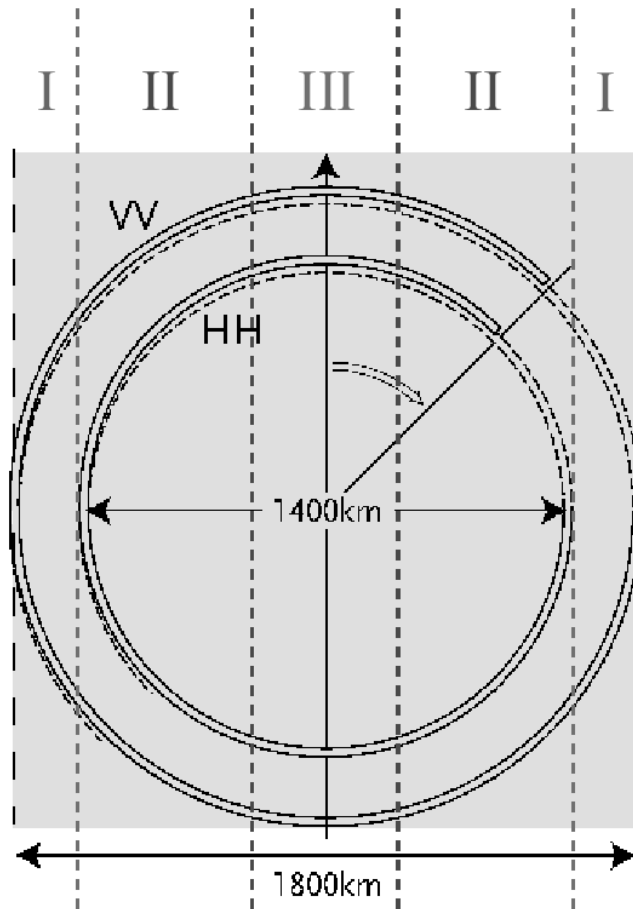

**Figure 1:** Earth surface coverage of the scans of the horizontal (HH) and vertical polarisation (VV) pencil-beams of SeaWinds. As the satellite propagates towards the top of the page the swath (in grey) is illuminated, and three areas are discriminated:

*I: Outer swath: only viewed once by the VV beam in the forward direction, and once in the aft direction (2 views);*

*II: Sweet (inner) swath: Viewed both by the VV and HH beam, both in fore and aft direction (4 views);*

*III: Nadir (inner) swath: As II, but the azimuth view direction is close to the satellite propagation direction, or just opposite to it.*

Scatterometers fly on polar-orbiting satellites, for SeaWinds these are the NASA/NOAA QuikSCAT and Japanese ADEOS-II platforms. The OSI SAF now produces operationally SeaWinds scatterometer wind data. Data are read out once per orbit usually, which lasts about 100 minutes. This means that a delay of up to 100 minutes is already present at read-out. Dedicated transmission lines and fast processing are needed to limit further delays.


### 2.1. SeaWinds-I and SeaWinds-II

Two SeaWinds scatterometers are developed and flown. The SeaWinds on QuikSCAT mission (from NASA/NOAA) is a “quick recovery” mission to fill the gap created by the loss of data from NSCAT, when the ADEOS-1 satellite lost power in June 1997. It was launched in June 1999 and is still operational. A similar version of the instrument (SeaWinds-2) flew on the Japanese ADEOS-2 satellite, launched in December 2002, which was regrettably lost in October 2003. For detailed information on the QuikSCAT instrument and data we refer to Spencer et al. (1997), JPL (1997, 2001), and [Ref.7]. A brief description is given below.

The SeaWinds instrument is a conically scanning pencil-beam scatterometer, as depicted in figure 1. It uses a rotating 1-meter dish antenna with two “spot” beams of about 25-km size on ground, a horizontal polarisation beam (HH) and a vertical polarisation beam (VV) at incidence angles of  $46^\circ$  and  $54^\circ$  respectively, that sweep the surface in a circular pattern. Due to the conical scanning, a WVC is generally viewed when looking forward (fore) and a second time when looking aft. As such, up to four measurement classes (called “beam” here) emerge: HH fore, HH aft, VV fore, and VV aft, in each wind vector cell (WVC). The 1800-km-wide swath covers 90% of the ocean surface in 24 hours and represents a substantial

improvement compared to the side-looking scatterometers, where the largest coverage, given by NSCAT, is only half of SeaWinds coverage, i.e. 90% of the ocean surface within 48 hours.

On the other hand, the wind retrieval from SeaWinds data is not trivial. In contrast with the side-looking scatterometers, the number of measurements and the beam azimuth angles vary with the sub-satellite cross-track location (see figure 1). A detailed discussion is provided in [Ref-5; pages 22-23]. The wind retrieval skill will therefore depend on the position in the swath as illustrated in figure 2.

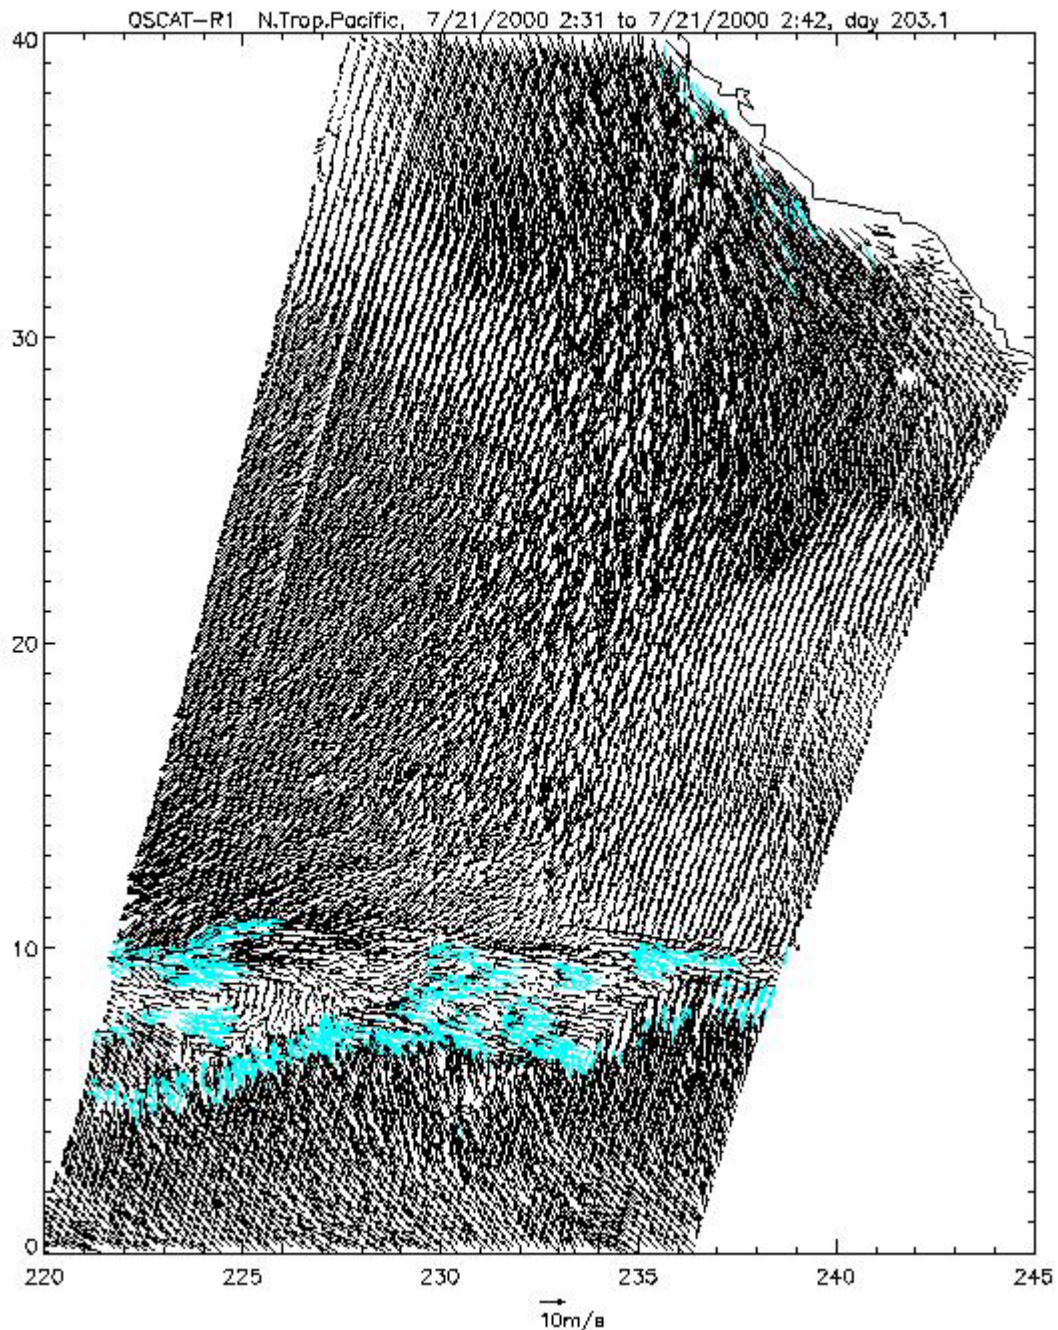

**Figure 2:** SeaWinds product processed on a 25-km grid. The wind retrieval on the grid results in four solutions of which one is selected by the ambiguity removal procedure. Note the varying noise properties in the parts of the swath indicated in Figure 1. The blue patches are flagged as rain contaminated.

In the outer swath (region I in figure 1) the two looks result in an ambiguous set of generally four wind solutions with an equal probability of about 25%. Measurement noise here results in systematic wind direction errors, which is why the outer swath is often well visible in figure 2. In the nadir swath (region III in figure 1) insufficient azimuth views are available for wind retrieval and the measurement noise causes a rather noisy wind field. As we enter the sweet swath, this noise becomes smaller, but does generally not disappear altogether. At KNMI a spatially averaged product was developed at 100 km, which strongly reduces the measurement noise, as shown in section 6. Rather uniform and high quality winds are then obtained in regions II and III. Due to a more difficult QC in region I, this region is not processed at KNMI at the time of writing this manual.

## **2.2. Rain problem**

The NASA scatterometers work at a Ku-band radar wavelength. The atmosphere is not transparent at these wavelengths and in particular rain is detrimental for wind computation. In fact, moderate and heavy rain cause bogus wind retrievals of 15-20 m/s wind speed which need to be eliminated by a quality control step. Wind-rain discrimination is easiest to manage in the sweet swath, performs acceptable in nadir, but is problematic in the outer swath.

## **2.3. Sea ice detection**


Due to the availability of VV and HH polarisation measurements, discrimination of water and ice surfaces is generally well possible and performed by NOAA [Ref-7].



### 3. Algorithms

Scatterometry was developed heuristically. It was found experimentally that the sensitivity to wind speed and direction describe well the changes in backscatter over the ocean at moderate incidence angles due to changes in surface roughness, as depicted in figure 3 (Valenzuela, 1978). In return, backscatter measurements can be used to determine the wind speed and wind direction in a WVC.

In the NWP SAF development phase the ERS scatterometer (SCAT) processing has been successfully extended to SeaWinds. A schematic illustration of the processing is given in figure 4. After defining the wind output and motivating the Geophysical Model Function that is used, the algorithms developed at KNMI are described.

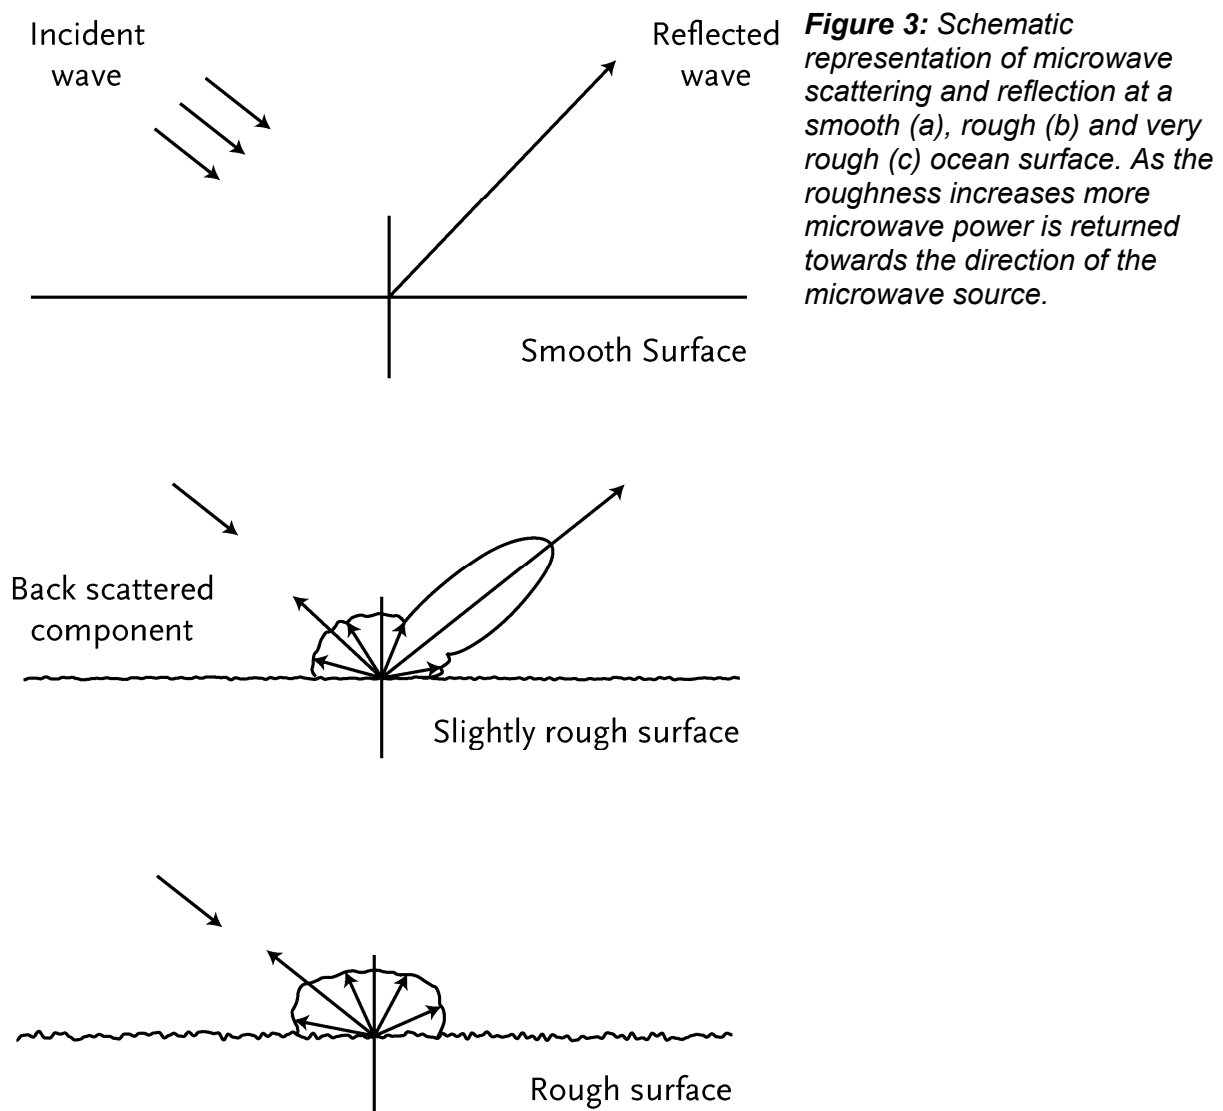

**Figure 3:** Schematic representation of microwave scattering and reflection at a smooth (a), rough (b) and very rough (c) ocean surface. As the roughness increases more microwave power is returned towards the direction of the microwave source.

#### 3.1. Wind definition


A scatterometer measurement relates to the ocean surface roughness (see figure 3), while the scatterometer product is represented by the wind at 10m height over a wind vector cell (WVC). It is important to realize that in the approach followed here the radar backscatter measurement  $\sigma_0$  is related to the wind at 10 meter height above the ocean surface, simply

because such measurements are widely available for validation. This means that any effect that relates to the mean wind vector at 10 meter height is incorporated in the backscatter-to-wind relationship. As such, air stability, the appearance of surface slicks, and the amplitude of gravity or longer ocean waves, depend to some degree on the strength of the wind and may, to the same degree, be fitted by a geophysical model function, GMF ([Ref-6]; Chapter I). Stoffelen ([Ref-6]; Chapter IV) discusses a unique method to determine the accuracy of scatterometer, buoy, and NWP model winds.

### 3.1.1. Geophysical Model Function

For the KNMI SeaWinds product the NSCAT-2 geophysical model function (GMF) is used (Wentz and Smith, 1999). Portabella ([Ref.5]; page 153) compares the QSCAT-1 (Freilich et al, 2002) and NSCAT-2 Ku-band GMFs and found that the latter is of better quality, since the former leads to more wind solutions during wind retrieval, i.e., is more ambiguous.

At low wind speeds the wind direction and speed may vary considerably within the WVC. Locally, below a speed of roughly  $2 \text{ ms}^{-1}$  calm areas are present where little or no backscatter occurs, perhaps further extended in the presence of natural slicks that increase the water surface tension (Donelan and Pierson, 1987). However, given the variability of the wind within a footprint area of 25 or 50 km it is, even in the case of zero mean vector wind, very unlikely that there are no patches with roughness in the footprint. As the mean vector wind increases, the probability of a calm patch will quickly decrease, and the mean microwave backscatter will increase. Also, natural slicks quickly disappear as the wind speed increases, and as such the occurrence of these is correlated to the amplitude of the mean vector wind over the footprint, as modelled by the GMF. Low scatterometer wind speeds are thus providing useful information.

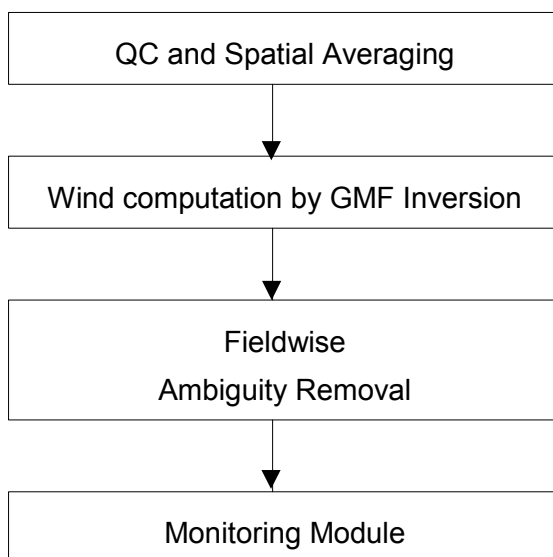


*Figure 4: Overview of SeaWinds algorithms*

At high wind speeds wave breaking will further intensify, causing air bubbles, foam and spray at the ocean surface, and a more and more complicated ocean topography. Although theoretically not obvious, it is empirically found that  $\sigma_0$  keeps increasing for increasing wind speed up to 25 m/s and even higher, and that a useful wind direction dependency remains (Donnelly et al, 1999).

### 3.2. Wind Retrieval

The GMF has two unknowns, namely wind speed and wind direction, so, if more than two backscatter measurements are available then these two unknowns may be estimated using a maximum-likelihood estimator (MLE) as the objective function for determining wind vector solutions (Pierson, 1989; 1990). The MLE is defined by

$$J = -\sum_{i=1}^N \frac{(\sigma_{oi} - \sigma_m(u, \chi_i))^2}{Var(\sigma_m)_i}$$

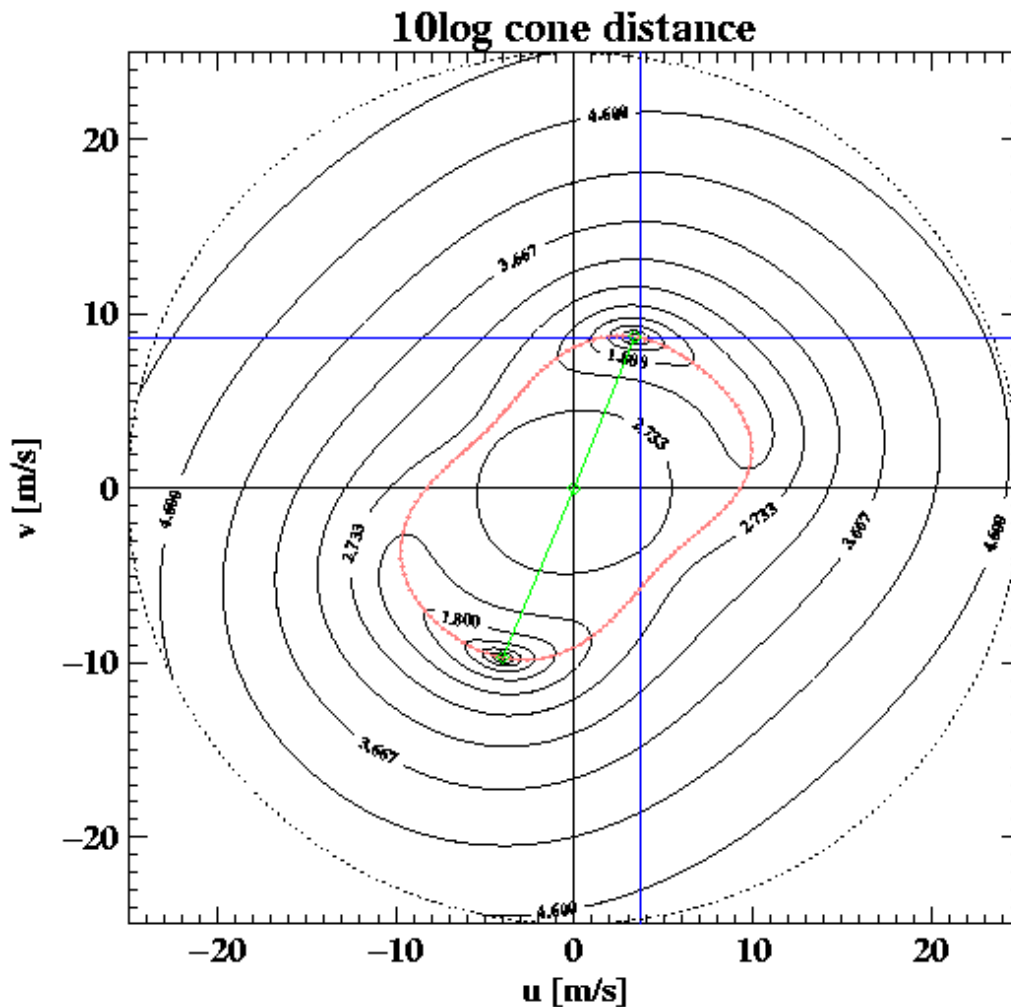

**Figure 5:** The wind retrieval objective function  $J$  as a function of wind vector components  $u$  and  $v$  for four collocated fore and aft beam measurement of radar backscatter. The cross indicates the position of the most likely ambiguous solution. The other solution is opposite.

where  $\sigma_{oi}$  are the backscatter measurements,  $\sigma_m(u, \chi_i)$  are the model backscatter values corresponding to the measurements, and  $Var(\sigma_m)_i = (K_{pi}^2 \sigma_{oi}^2)$  are the measurement variances. Note that in the NOAA product  $Var(\sigma_m)_i = (K_{pi}^2 \sigma_{mi}^2)$  is used, i.e., the noise variance estimated by the modelled rather than the observed backscatter. We [Ref-5] found the latter to perform better. The local minima of  $J$  correspond to wind vector solutions. The three or more independent measurements should well sample the azimuth variation of the GMF in order to resolve the wind direction, albeit ambiguously.

The problem of ambiguity illustrated in figure 5 does generally not disappear if more measurements become available. However, multiple azimuth views and polarisation measurements do increase the probability that one of the ambiguous solutions becomes more likely than the other ones. Stoffelen, de Vries and Voorrips (2001) describe that SeaWinds retrievals at 100 km resolution are much less ambiguous than retrievals at 25 km due to this (see also section 6).

### **3.2.1. Ambiguity Removal**

SeaWinds scatterometer winds have a multiple ambiguity and there are up to four wind solutions in each wind vector cell (WVC) on the earth's surface. These ambiguities are removed by applying constraints on the spatial characteristics of the output wind field, such as on rotation and divergence. Several ambiguity removal (AR) schemes were evaluated for ERS data (Stoffelen, de Haan, Quilfen and Schyberg, 2000). In the OSI SAF Development Phase some schemes that were developed for the SCAT were compared. In addition to the subjective comparison of AR schemes, a method for the objective comparison of AR performance among the different schemes was used. Stoffelen et al (2002) show that this way of comparison is effective to evaluate the shortcomings of AR schemes, but also reveals a more general way forward to improve AR, which is followed up during IOP by tuning 2D-VAR. For SeaWinds this tuned version of 2D-VAR is used.

For the 25-km wind product, a somewhat different approach called MSS (Multiple Solution Scheme) is used. In this approach, the full circle of possible wind directions is divided in 144 equal sectors of 2.5° and for each wind direction an optimal wind speed with its corresponding probability is calculated in the wind retrieval step. Subsequently, the 144 solutions of each WVC are used in the AR to select the optimal solution. In this way, the full probability density function of the wind solutions is used (Portabella and Stoffelen, 2004).

### **3.2.2. Quality Control**

Since the scatterometer wind retrieval problem is over determined, this opens up the possibility of quality control (QC) by checking the inversion residual  $J$ . The inversion residual is in theory inversely proportional to the log probability that a node is affected solely by a uniform wind. Generally this probability is low when rain affects the WVC, or there is substantial wind variability within the cell;

As such, Portabella and Stoffelen (2002) found that the inversion residual is well capable of removing cases with extreme wind variability (at fronts or centres of lows), or with other geophysical variables affecting the radar backscatter, such as rain. QC is performed on the 25-km NASA or NOAA grids and rejection percentages vary between 1-5%. In the nadir WVCs **both** the JPL rain flag and the KNMI residual check are used for QC.

### **3.3. Detailed SeaWinds algorithm description**

SeaWinds processing is described in some detail in [Ref-4]. The KNMI extensions to the NOAA and NASA SeaWinds processing are described in Stoffelen (2000) and in Portabella [Ref-5].

### **3.4. Monitoring**

Automatic ways of monitoring backscatter data quality and wind products is of the utmost importance for using the data, in particular for routine use in NWP, for example. The way of monitoring at KNMI is reported in de Vries, Stoffelen and Beysens (2005). In short, a multi-step check is used for each product (half orbit), and if

- the number of QC rejections is above a threshold, or
- the mean normalised residual  $J$  is above a threshold for those data where a wind solution can be calculated, or

- the wind speed bias against the NWP reference is above a threshold, then the monitoring flag is raised and the output is suspicious. The false alarm rate of the monitoring flag is about 0,001 %.

## 4. Processing scheme

KNMI has an operational processing chain running in near real-time with SeaWinds data, including visualisation on the web: [http://www.knmi.nl/scatterometer/gscat\\_prod/](http://www.knmi.nl/scatterometer/gscat_prod/) (100-km product) and [http://www.knmi.nl/scatterometer/gscat\\_25\\_prod/](http://www.knmi.nl/scatterometer/gscat_25_prod/) (25-km product). This processing is performed using the NWP SAF software. The processing includes monitoring and archiving functionalities. A global overview of the modules of our SeaWinds scatterometer processor is given below. Figure 6 gives an overview of the entire processing system of SeaWinds.

### 4.1. NWP collocation

KNMI receives NWP model data from ECMWF twice a day through the RMDCN.

NWP model sea surface temperature data is used to provide information about possible ice presence in the WVCs. WVCs with a sea surface temperature below 271.56 K (-1.6 °C) are assumed to be covered with ice and no wind information is calculated. This ice check, which is usually inactive, is done in addition to the evaluation of the JPL ice flags which are present in the NOAA input product. If the JPL ice screening fails, the ice is still detected by the SST check.

NWP forecast wind data are necessary in the ambiguity removal step of the processing. ECMWF wind forecasts are available twice a day (00 and 12 GMT analysis time) with forecast time steps of +3h, +6h, ..., +36h. The 10-m model wind data are averaged with respect to time and location and put into the model wind part of each WVC, where they replace the NCEP 1000-hPa forecast winds that are present in the NOAA input product. This has a positive input on the output product quality and eases the product monitoring and validation [Ref-8].

### 4.2. Validation

Each step in the processing is validated separately and also the product as a whole by a quality control and monitoring scheme. The product validation step is controlled by visual inspection, and a statistical analysis is performed to control the validation steps. The inversion step is controlled in the same way. For ambiguity removal schemes an objective scheme exists that relies on initialisation with a one-day lead NWP forecast and validation of the ambiguity selection against NWP analyses, as in Stoffelen et al (2002). Moreover, Stoffelen, de Vries and Voorrips (2001) describe subjective comparison of the 2D-VAR and PreScat schemes by routine operational meteorologists.

### 4.3. Quality control and monitoring

The quality of the delivered products is controlled through an ad hoc visual examination of the graphical products and the automatic production of control parameters.

The examination of the products is done at KNMI by experts. Specific tools have been developed to help this analysis. User queries obviously lead to the inspection of suspect products. The ad hoc and user queried inspections are used for quality assurance.

An information file is made for each product. The content of the file is identical whatever the product and results from a compilation of all the global information concerning this product. From these files, various graphs are produced to visually display the confidence levels of the products and their evolution with time, some of these graphs are available on the WWW site for product quality monitoring by the users.

### 4.4. Software Configuration

To keep record of system configuration and releases and the history of the source files in the processing system, the development team at KNMI uses the Concurrent Version System (CVS).

### 4.5. Dissemination

SeaWinds BUFR products are put available on a password-protected FTP site. This password is provided to new users by E-mail request. Data are available also through the EUMETCast system.

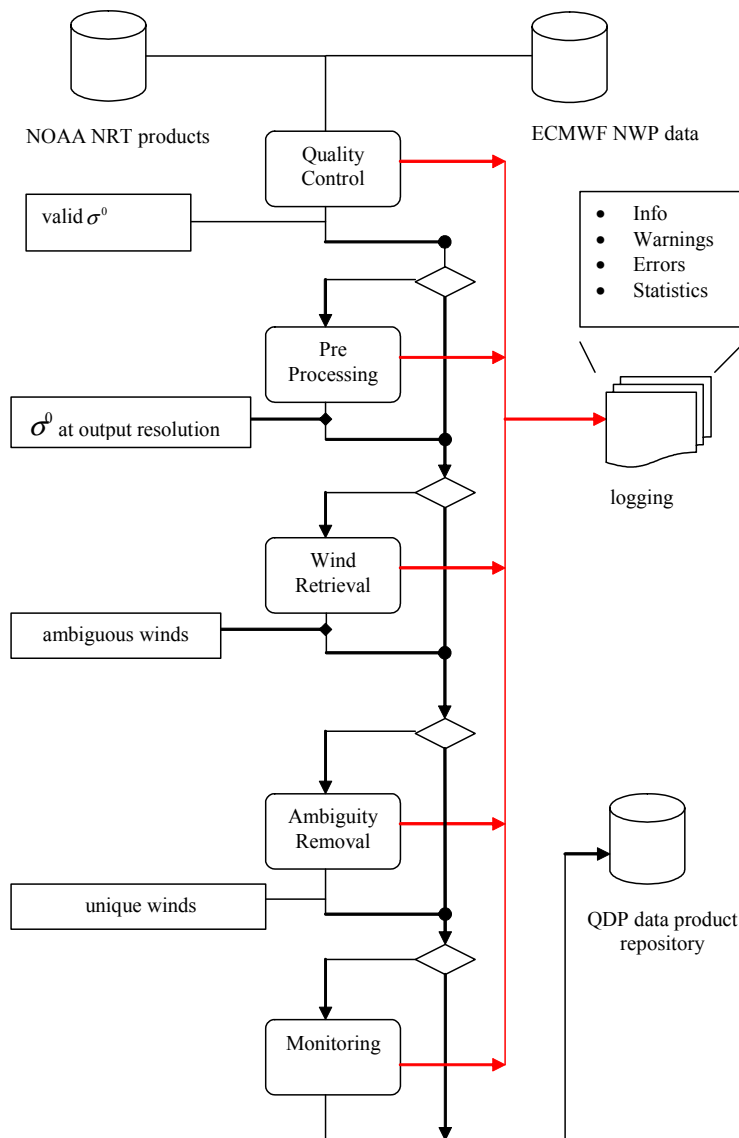


Figure 6: SeaWinds Data Processor (de Vries, 2003).

## 5. Data description

### 5.1. Wind product characteristics

#### **Physical definition**

Wind vector at 10m height.

#### **Units and range**

Wind speed is measured in m/s and wind direction in meteorological (WMO) convention relative to North: 0 degrees corresponds to a wind flowing to the South with a clockwise increment. The wind speed range is from 0-50 m/s, but wind speeds over 25 m/s are generally not reliable (cf Donnelly et al, 1999).

#### **Input satellite data**

SeaWinds BUFR data from NOAA are described in their user manual (see [Ref-7]).

Product computed from FTPed BUFR messages issued by NOAA to the UK Met.Office, and by the UK Met.Office to KNMI, containing geolocated measurement quadruplets on a satellite swath grid of 25 km size. Portabella ([Ref-5]; section 2.4) shows that the backscatter data in the BUFR and the off-line product are of similar quality despite processing differences. The delay of the input SeaWinds data is up to 3 hours delay from observation time

#### **Geographical definition**

Satellite swath projection. Swath is located below the satellite. The QuikSCAT satellite proceeds in a near-polar orbit at 98 degrees inclination at 800 km orbit height. Equator ascending crossing time is 10 UTC. Swath width is 76 (19) 25-km (100-km) size WVC each side. At KNMI we currently only use WVC for which four backscatter measurements are available (WVCs 9-68), nominally resulting in 15 100-km size WVCs. This substantially reduces the overlap of subsequent files. Products are organised in batches of about half an orbit along track.

#### **Time resolution**

Polar satellites have the capability to provide data twice daily. The SeaWinds swath width of 1800 km provides full coverage twice a day for latitudes above 50 degrees. KNMI processes a 1400 km swath where above 60 degrees full coverage at least twice daily is provided. The dissemination frequency of the scatterometer data is about every 50 minutes in half orbit files. Every useful input backscatter product has a corresponding output wind product.

#### **Coverage**

Global (see web visualisation).

#### **Output product**

The input product in BUFR is processed into a BUFR output product with a unique wind solution (chosen) and its corresponding ambiguities, quality information (probability of solution, quality flag, e.g., monitoring bit).

#### **Delivery time**

A wind product is available for distribution 10 minutes after the backscatter product reception at KNMI.

#### **Expected accuracy**

The expected accuracy is defined as the expected bias and standard deviation of the primary calculations. The accuracy is validated against in situ wind measurements from buoys, platforms, or ship, and against NWP data. Even better, the errors of all NWP model winds, in



situ data, and scatterometer winds are computed in a triple collocation exercise ([Ref-6], Djepa, 2002). The performance is pretty constant over the globe and depends mainly on the subfootprint wind variability. The performance of the products issued by KNMI is characterised by a wind vector RMS error smaller than 3 m/s.

## 5.2. File formats

Wind products are in BUFR. A complete description of BUFR can be found in WMO publication No 306, Manual on Codes. The graphical display of the wind products is available and explained on the web: [http://www.knmi.nl/scatterometer/qscat\\_prod/](http://www.knmi.nl/scatterometer/qscat_prod/) and [http://www.knmi.nl/scatterometer/qscat\\_25\\_prod/](http://www.knmi.nl/scatterometer/qscat_25_prod/).

The 100- km and 25-km KNMI wind products are stored in exactly the same BUFR format as described in the SeaWinds BUFR manual from NOAA [Ref-7]. Data are organised in files containing approximately 75-90 minutes of data.

The file name convention for SeaWinds 100-km data is:

QS100\_Dyyddd\_Shmmm\_Ehhmm\_Bxxxxxxx

QS100\_ - is a fixed prefix, denoting 'QuikSCAT' and 100-km resolution

Dyyddd\_ - yyddd contain year (two digits) and day of year (001 - 366) at start of data acquisition in this file (GMT)

Shmmm\_ - hhmm contains hour and minute of start of data acquisition in this file (GMT)

Ehhmm\_ - hhmm contains hour and minute of end of data acquisition in this file (GMT)

Bxxxxxxx - contains information about satellite orbit number

Examples of file names are QS100\_D05186\_S2352\_E0107\_B3148182 or QS100\_D05187\_S1123\_E1251\_B3148889. The file name convention is applicable to the files which are available on the KNMI FTP server. The files which are disseminated through EUMETCast have a fixed prefix 'S-OSI\_-KNMI-' before this file name, for example S-OSI\_-KNMI-QS100\_D05186\_S2352\_E0107\_B3148182.

The file name convention for the 25-km data is identical, but the QS100 part is replaced by QS025, denoting 25-km resolution.

In each node or wind vector cell (WVC) 118 data descriptors are defined. In addition some extra information/alterations have been put in place:

- In the BUFR header the value for "generating centre" is set to 99, representing KNMI.
- The value of byte 18 in BUFR section 1 identifies the generating application.
- The 100-km product contains up to four ambiguous wind solutions, with an index to the selected wind solution. The 25-km product only contains the selected wind solution (if present), with the index pointing to this solution. In the 25-km product, the 'Likelihood Computed for Wind Solution' does not contain the probability, but the normalised inversion residual (referred to as Rn in [Ref-5]).
- The Wind Vector Cell Quality Flag (table 021109) is redefined and now has the following definitions:

| Description  | BUFR bit | Fortran bit |
|--|----------|-------------|
| Not enough good sigma-0 available for wind retrieval | 1        | 15          |
| Not used   | 2-3      | 14-13       |
| Monitoring flag                                      | 4        | 12          |

| Description  | BUFR bit   | Fortran bit |
|--|------------|-------------|
| Monitoring value   | 5          | 11          |
| KNMI+JPL Quality Control (including rain)  | 6          | 10          |
| Variational QC   | 7          | 9           |
| Land presence  | 8          | 8           |
| Ice presence   | 9          | 7           |
| Not used   | 10         | 6           |
| Reported wind speed is greater than 30 m/s   | 11         | 5           |
| Reported wind speed is less than or equal to 3 m/s                                   | 12         | 4           |
| Not used   | 13         | 3           |
| Rain flag algorithm detects rain   | 14         | 2           |
| Data from at least one of the four possible beam/view combinations are not available | 15         | 1           |
| Not used   | 16         | 0           |
| Missing value  | All 17 set | All 17 set  |

In Fortran, if the Wind Vector Cell Quality Flag is stored in an integer **I** then use **BTEST(I,NDW-NB-1)** to test BUFR bit **NB**, where **NDW=17** is the width in bits of the data element in BUFR.

If the monitoring flag is set to zero, the product is monitored. If the product is monitored and the monitoring value is set to zero, the product is valid, otherwise it is rejected by the monitoring. The monitoring flag and value are the same for all WVCs in one BUFR output file.

If the KNMI+JPL QC flag is set in a 25-km WVC, then the backscatter information is not useable for various geophysical reasons like rain, confused sea-state etc, and the corresponding 100-km or 25-km WVC bit is set. JPL rain flag information is incorporated in this flag for the nadir swath Wind Vector Cells. Moreover, this flag is set when the wind speed in one or more of the wind solutions is 50 m/s. The presence of such wind solutions has proven to be a reliable indicator for sea ice in the Wind Vector Cell. WVCs, in which the KNMI+JPL QC flag is set, are not used in the calculation of the analysis field in the ambiguity removal step. However, after the ambiguity removal the wind solution closest to the analysis field is chosen (if wind solutions are present in the WVC). This means that such a WVC may contain a selected wind solution, but it is suspect.

Land/Ice presence flag is set if at least one of the 25-km WVCs in a 100-km super WVC is flagged as containing land/ice in the NOAA NRT BUFR product. This may be a flag in one of the sigma0 surface flags or in the WVC quality flag of the input. If more than half of the 25-km WVCs in a 100-km super WVC has bits 6, 8 or 9 set, the 100km WVC is rejected (no wind is calculated).

If the Variational QC flag is set, the wind vector in the WVC is rejected during ambiguity removal due to spatial inconsistency.

For recommendations on the use of the Quality Flag, see section 6.4.

## 6. Data Quality

NOAA provides a near-real time wind product that is used as basis for further processing at KNMI. Our SeaWinds products are different from the NASA and NOAA products, since special emphasis is put on

- increasing the **reliability** of the wind vectors by Quality Control and rejection of rain-contaminated Wind Vector Cells;
- improving **accuracy** by noise reduction through spatial averaging and meteorological filtering (100-km product);
- Guaranteeing **correctness** by monitoring of the operational SeaWinds data and KNMI processing; and
- **Reduce** wind direction selection **errors** by meteorologically-balanced wind direction Ambiguity Removal (AR).

These wind quality issues are elaborated here.

### 6.1. Reliability

QC improves the quality of winds; however, at some rejection rate useful wind information may be lost. As such, QC is a compromise between rejection of useful data and accepting inferior data quality.

[Ref-5] (chapter 2) describes a method developed at KNMI for QC of SeaWinds data at 25 km resolution, based on similar methods used for the ERS and NSCAT scatterometers. We show that these methods also work in case of SeaWinds for the rejection of cases with

- extreme subfootprint wind or wave variability; and
- rain.

Concerning the latter point we compared our QC with the JPL rain flag and found

- Despite the fact that the JPL rain flag is set, KNMI accepts a 2% category of high wind speed data. However, SSMI shows no rain in this category in about 85% of cases, even if these winds are often found in the storm track region in the vicinity of intense low pressure systems. We regard these SeaWinds data of great meteorological interest.
- In the sweet swath region (see figure 1) the QC is superior and sufficient, but in the nadir part of the swath we use both the KNMI QC **and** the JPL rain flag.


#### 6.1.1. Usable 100 km WVC

A 100-km WVC is used if for all four beams at least eight of sixteen backscatter values are present. This choice was verified to provide satisfactory wind quality and quantity. The front cover shows an example where close to the low and close to the cold front some WVC are rejected (red dots). The only further QC at 100 km resolution is performed during AR (section 6.3).

### 6.2. Accuracy

Figure 2 shows that SeaWinds wind variability at 25-km resolution is WVC number dependent. This is due to the effect of instrument noise dominating the wind retrieval. Obviously, we would like the true wind field to dominate the wind variability and thus a variability which is independent of WVC. At KNMI we chose to reduce the instrumental noise by spatial averaging and developed a 100-km SeaWinds product.

QSCAT: 20021002 11:13Z HIRLAM:2002100209+3 IR: 12 IR: 12 at LAT LON:15.8E

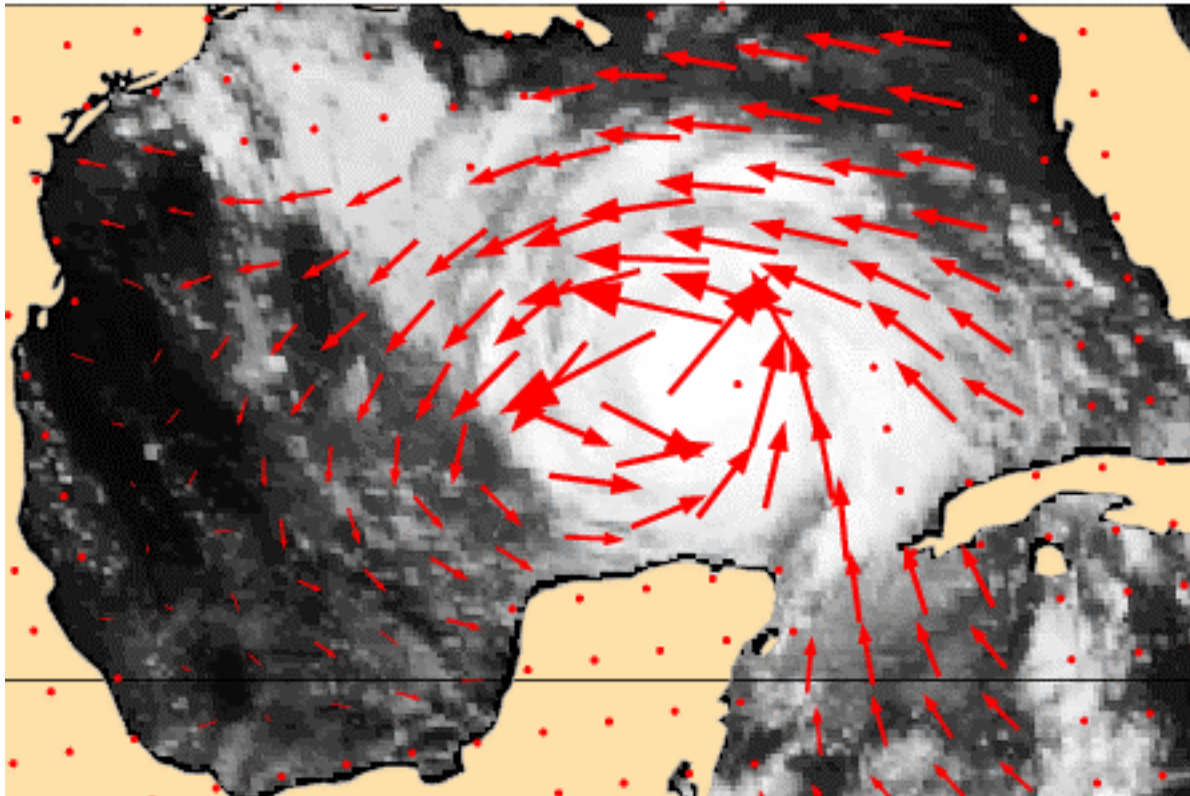


**Figure 7:** KNMI SeaWinds product in the Gulf of Mexico for a tropical cyclone. A handful of points are rejected by our QC, but the cyclone structure remains clear.

| SD        | KNMI  | DIRTH |
|-----------|-------|-------|
| Speed     | 1.31  | 1.64  |
| Direction | 13.58 | 14.58 |
| U         | 1.60  | 1.96  |
| V         | 1.58  | 1.80  |

**Table 1:** KNMI and NOAA DIRTH SeaWinds product difference with ECMWF first guess winds for a set of triple collocated wind points. Speed, direction, and wind component difference standard deviations (SD) are shown. KNMI winds verify better against ECMWF, in particular for wind speed.


The 100-km resolution wind product is of reduced resolution compared to the original NOAA 25-km product, which is obtained by means of  $\sigma_0$ -averaging. The product is more consistent with NWP model winds than the original product, which makes it more suitable for use in NWP models. Evidence of this is given in table 1 and figures 8 and 9.

As can be seen in table 1, the 100-km product clearly compares better to the independent ECMWF winds than the NOAA SeaWinds Product.

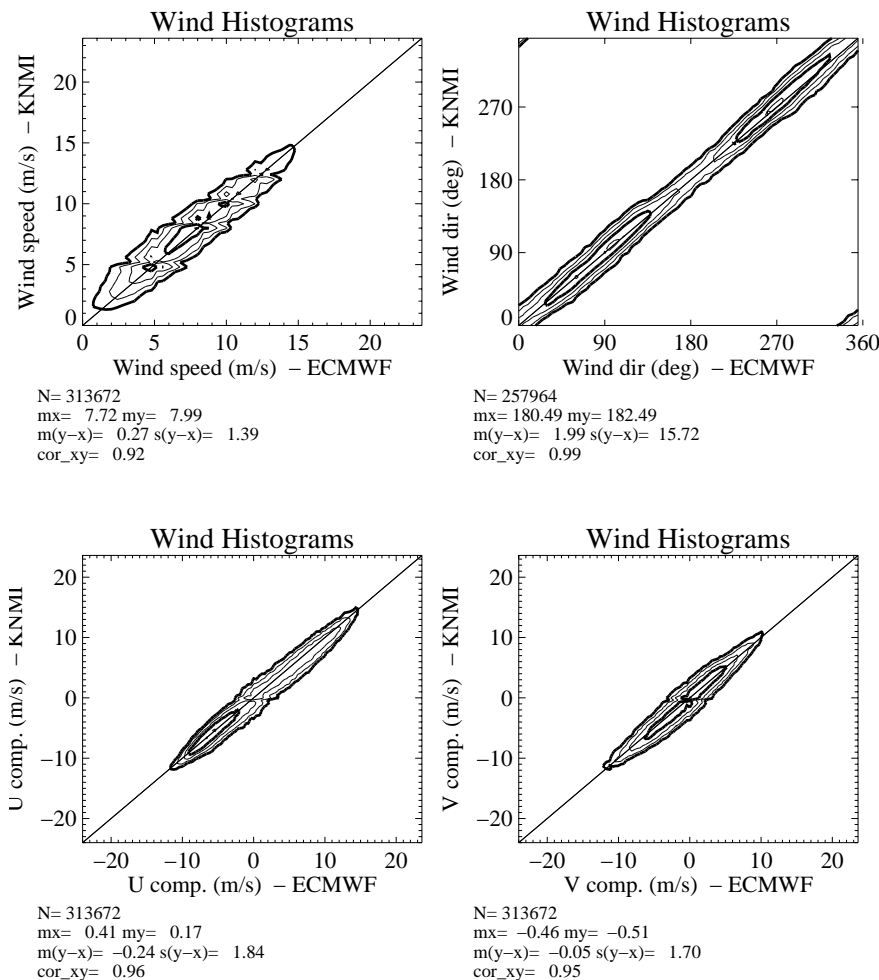

**Figure 8:** Contoured histograms of the 100km KNMI wind product


Both figures 8 and 9 give the wind speed, direction and component statistics referenced against collocated ECMWF 10m wind analysis for the 100-km KNMI wind product and the 25-km NOAA product thinned to 100-km resolution respectively. The data for these plots are from consecutive orbits from January 27<sup>th</sup> 2002 until February 3<sup>rd</sup> 2002. The 100-km wind product was made with the QDP in default settings mode (Variational Quality Control and KNMI quality control). The thinning of the NOAA product was realized by taking winds from the nearest neighbour 25-km WVC closest to the centroid of the 100km super WVC. The wind direction statistics are based on winds with wind speeds larger than 4 m/s. From the joint distributions and accompanying statistics in all plots of both figures it is evident that the random error of the difference distribution,  $s(y-x)$ , is smaller for the 100-km product. In addition the systematic error in the difference distribution,  $m(y-x)$ , is also smaller for the 100-km product except for the wind direction. The asymmetric peak in the U-component distribution in both figures is due to the systematic sampling of the trade winds. The jaggedness of the wind speed distributions is due to the fact that the retrieved scatterometer wind speeds stem from the GMF lookup table. Both figures show that currently in the trade off between resolution and noise, QuikSCAT winds at 100-km resolution are the preferred product for NWP data assimilation.

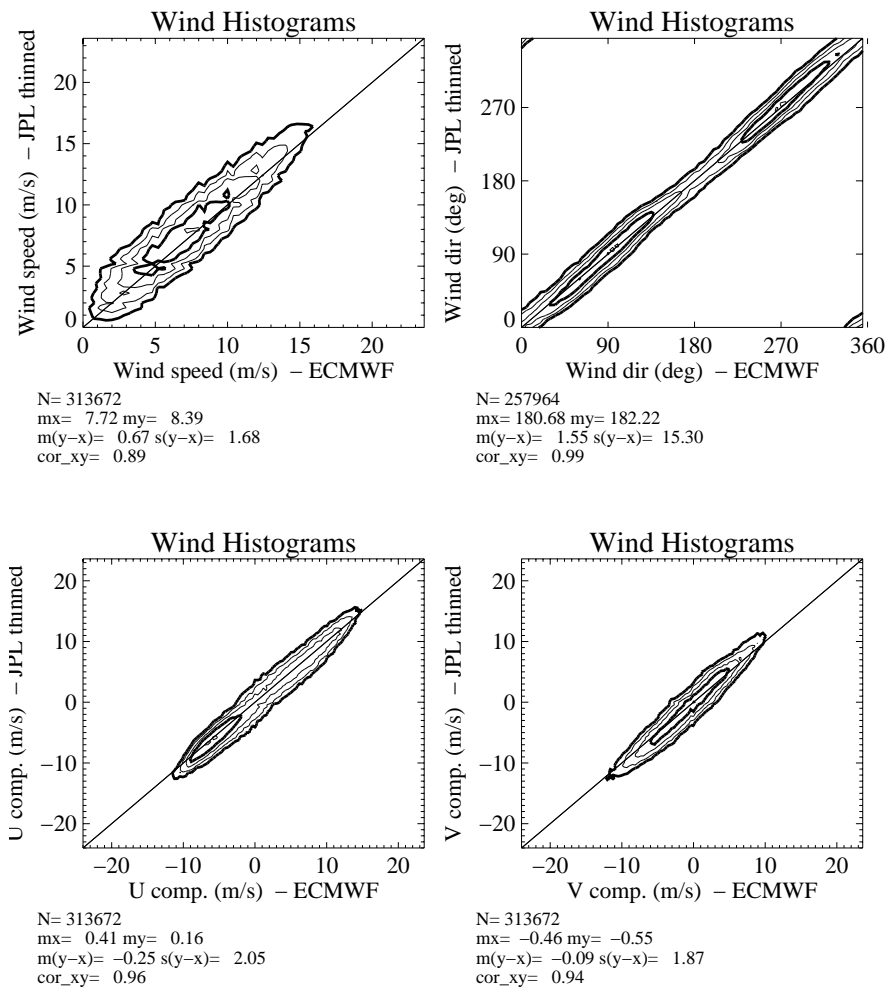

**Figure 9:** As figure 8 but for the thinned NOAA product

In our verification, the NOAA DIRTH processing tends to deliver reasonably smooth wind direction (see figure 10), but rather variable wind speeds. On the other hand, the 100-km product exhibits similar scales and variability in both wind speed and direction. This is what one may anticipate from the way both processing algorithms work.

The noise in the 100-km product is smaller than in the 25-km product and the performance more uniform over the swath, consistent with the initial objective.

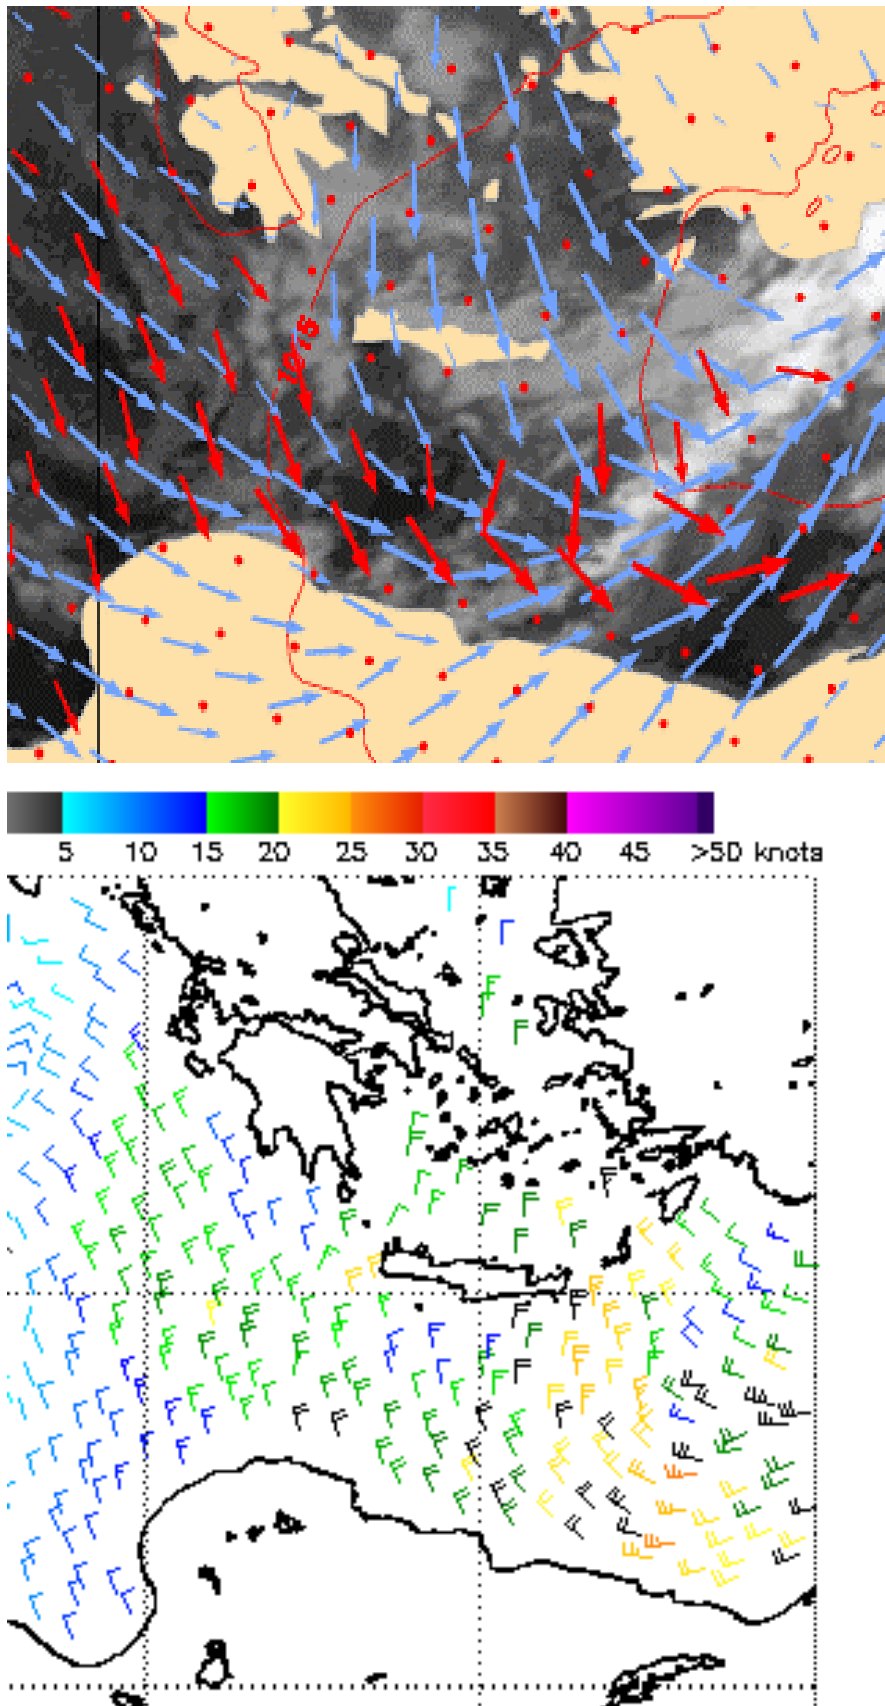

**Figure 10:** KNMI SeaWinds product (top) in the Mediterranean for a trough. In the DIRT NOAA product (bottom), the trough appears weaker due to the wind direction spatial smoothing. Blue winds are HIRLAM in the top panel, while here the background image is Meteosat IR. Black winds did not pass the JPL rain check in the bottom panel.

### **6.3. Ambiguity selection**

For SeaWinds a version of 2D-VAR is used with minimal regional performance differences (de Vries, Stoffelen and Beysens, 2005). This improved version was obtained after taking into account the findings of Stoffelen et al (2002). A variational QC step is performed to reject a few WVCs, which are in meteorological unbalance with their neighbours. This rejection rate, often called gross error rate, peaks at nadir and falls off quickly by a factor of two in the sweet swath.

### **6.4. Quality indices and data use**

We summarise the product quality indices here:

1. Rain/sea-state, ice, and land presence, resp. bits 6, 9, and 8, of WVC\_QUALITY\_FLAG (section 5.2); the land flag may be ignored since it indicates land *contamination*, if a too high land fraction is present in the WVC, no winds are calculated;
2. Monitoring flag and bit, resp. bits 4 and 5 of WVC\_QUALITY\_FLAG (sections 5.2 and 3.4); a selected wind may be given, but it should be suspected if bits 4 **and** 5 are set;
3. Variational QC bit 7 of WVC\_QUALITY\_FLAG (section 5.2); if this bit is set, the selected wind is spatially inconsistent with its neighbours and suspect.



## 7. Glossary

|           |   |
|-----------|---|
| ADEOS     | (Japanese) Advanced Earth Observation Satellite                   |
| AR        | Ambiguity Removal   |
| ASCAT     | Advanced Scatterometer  |
| BUFR      | Binary Universal Format Representation                            |
| CM SAF    | Climate SAF   |
| DLI       | Downward Longwave Radiation                                       |
| EPS       | EUMETSAT Polar Satellite  |
| ERS       | European Remote-Sensing Satellite                                 |
| EUMETCast | EUMETSAT's Digital Video Broadcast Data Distribution System       |
| GOES      | Geostationary Operational Environmental Satellite                 |
| HDF       | Hierarchical Data Format  |
| HH        | Horizontal polarisation send and receive mode                     |
| IR        | InfraRed  |
| JPL       | Jet Propulsion Laboratory (NASA)                                  |
| KNMI      | Royal Netherlands Meteorological Institute                        |
| MSS       | Multiple Solution Scheme  |
| NASA      | National (US) Air and Space Agency                                |
| NOAA      | National (US) Oceanic and Atmospheric Administration              |
| NSCAT     | NASA Scatterometer  |
| NWP       | Numerical Weather Prediction                                      |
| OSI SAF   | Ocean and Sea Ice SAF   |
| QC        | Quality Control   |
| QuikSCAT  | US dedicated scatterometer mission to bridge ADEOS-I and ADEOS-II |
| RMDCN     | Regional Meteorological Data Communication Network                |
| SAF       | Satellite Application Facility                                    |
| SeaWinds  | US scatterometer on-board QuikSCAT and ADEOS-II platforms         |
| SOS       | Scatterometer Ocean Stress  |
| SSI       | Surface Solar Irradiance  |
| SST       | Sea Surface Temperature   |
| SVVP      | Software Verification and Validation Plan                         |
| U         | West-to-east wind component                                       |
| V         | South-to-north wind component                                     |
| VV        | Vertical polarisation send and receive mode                       |
| WVC       | Wind Vector Cell  |

## 8. Literature

1. de Vries, J, Stoffelen, A and Beysens, J, Ambiguity Removal and Product Monitoring for SeaWinds, NWP SAF report NWPSAF\_KN\_TR\_001, 2005, available on <http://www.knmi.nl/scatterometer/publications/>
2. Donelan, M. A., and W. J. Pierson, Radar scattering and equilibrium ranges in wind-generated waves with application to scatterometry, *J. Geophys. Res.*, 92, 4971-5029, 1987
3. Donnelly, William J., James R. Carswell, and Robert E. McIntosh, Revised ocean backscatter at C and Ku band under high wind conditions, *J. Geophys. Res.*, 104, 11,485-11,497, 1999
4. Figa, J., and A. Stoffelen, 2000, "On the Assimilation of Ku-Band Scatterometer Winds for Weather Analysis and Forecasting", *IEEE-Transactions on Geoscience and Remote Sensing (special issue on Emerging Scatterometer Applications)* **38** (4), pp. 1893-1902
5. Freilich, M.H., B.A. Vanhoff, and R.S. Dunbar, Empirical determination of a Ku-band wind model function from SeaWinds scanning scatterometer, *J. Geophys. Res.*, 107 (C), 2002
6. Graham, R., D. Anderson, A. Hollingsworth and H. Böttger, Evaluation of ERS-1 wind extraction and ambiguity removal algorithms: meteorological and statistical evaluation, *ECMWF report*, ECMWF, Reading, England, 1989
7. Isaksen, L., and A. Stoffelen, 2000, "ERS-Scatterometer Wind Data Impact on ECMWF's Tropical Cyclone Forecasts", *IEEE-Transactions on Geoscience and Remote Sensing (special issue on Emerging Scatterometer Applications)* **38** (4), pp. 1885-1892
8. JPL, "QuikSCAT science data product user's manual", version 2.2, *Jet Propulsion Laboratory D-12985*, pp. 89, December 2001
9. JPL, "NASA scatterometer science data product user's manual," version 1.1, *Jet Propulsion Laboratory D-18053*, pp. 68, April 1997
10. Mastenbroek, Kees, "Wind-Wave Interaction", *thesis at the Delft University of Technology*, Delft, the Netherlands, 12 December 1996
11. Pierson, W.J., Probabilities and statistics for backscatter estimates obtained by a scatterometer, *J. Geophys. Res.*, 94, 9743-9759, 1989; Correction, *J. Geophys. Res.*, 95, 809, 1990
12. Portabella, M., A. Stoffelen, EUMETSAT fellowship report, 2002, available on <http://www.knmi.nl/scatterometer/publications/>
13. Spencer, M.W., Wu, C., and Long, D.G., "Tradeoffs in the design of a spaceborn scanning pencil beam scatterometer: application to SeaWinds," *IEEE Trans. Geosci. Rem. Sens.*, vol. 35, no. 1, pp. 115-126, 1997
14. Stoffelen, Ad, A Generic Approach for Assimilating Scatterometer Observations, ECMWF seminar 2000, available on <http://www.knmi.nl/scatterometer/publications/>
15. Stoffelen, Ad, John de Vries and Aart Voorrips, Towards the Real-Time Use of QuikScat Winds, BCRS project report, KNMI, de Bilt, 2001, available on <http://www.knmi.nl/scatterometer/publications/>
16. Stoffelen, Ad, Siebren de Haan, Yves Quilfen, and Harald Schyberg, ERS Scatterometer Ambiguity Removal Comparison, OSI SAF report, 2000, available on <http://www.knmi.nl/scatterometer/publications/>

17. Valenzuela, G. R., Theories for the interaction of electromagnetic and ocean waves - a review, *Bound. Layer Meteor.*, 13, 612-685, 1978
18. Wentz, F.J., D.K. Smith, A model function for the ocean normalized radar cross section at 14 GHz derived from NSCAT observations, *J. Geophys. Res.*, 104 (C5), 11499-11514, 1999
19. Wentz, F. J., S. Peteherych and L. A. Thomas, A model function for ocean radar cross sections at 14.6 GHz, *J. Geophys. Res.*, 89, 3689-3704, 1984
20. Portabella, M. and A. Stoffelen, A probabilistic approach for SeaWinds data assimilation, *Quart. J. Royal Meteor. Soc.*, 130, 127-152, 2004